RoHS COMPLIANT

REV.	REVISION	DATE

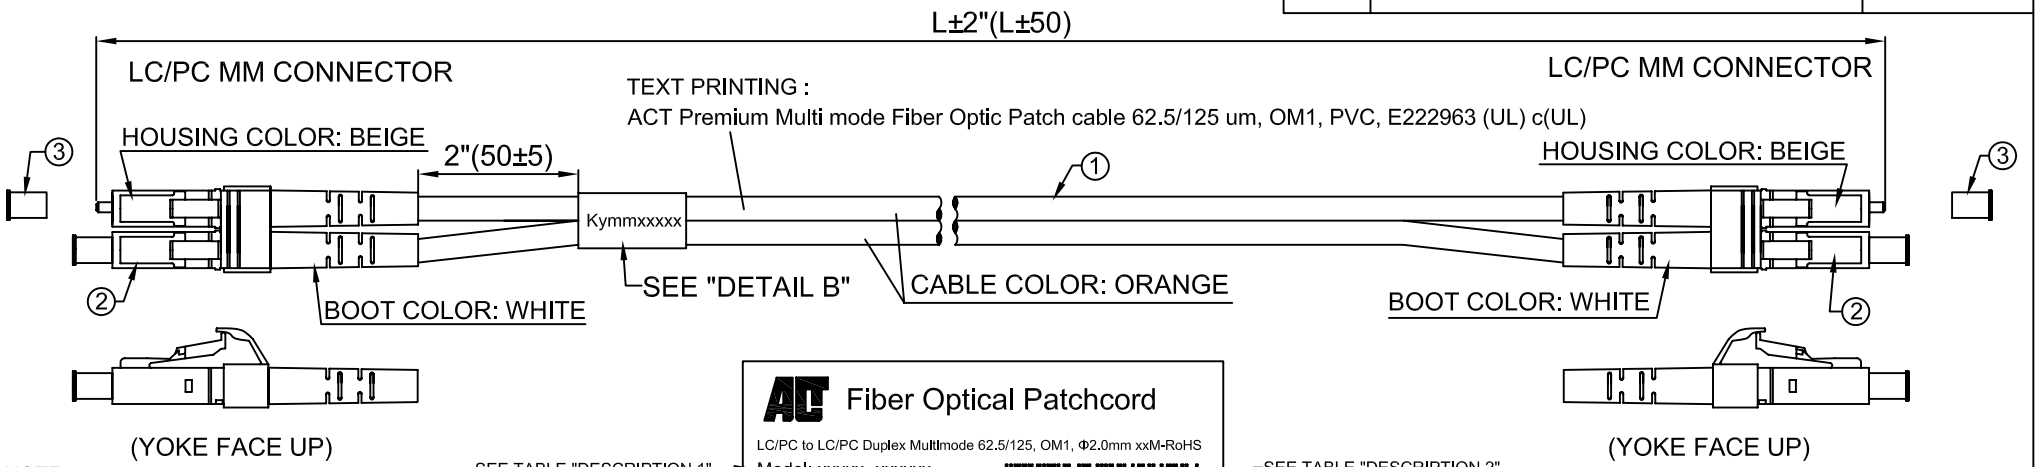

NOTE:
1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE LCRENGH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TELC CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

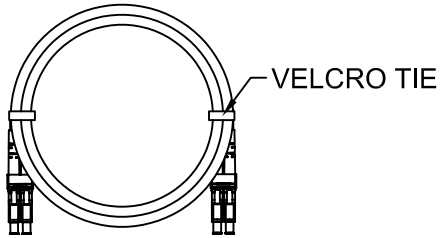

DETAIL A



DETAIL B
y: Year; mm: Month
xxxxx: Serial Number

Fiber Optical Patchcord

LC/PC to LC/PC Duplex Multimode 62.5/125, OM1, Φ2.0mm xxM-RoHS

SEE TABLE "DESCRIPTION 1" → Model: xxxxx -xxxxxx

Lot number:

PO/NO.

x x x x x x x x x x x x x x

SEE TABLE "DESCRIPTION 2"

Performance: (@23℃) λ=850/1310±20nm

Serial No		Insertion Loss ≤ 0.3dB	
		850nm	1310nm
Kymmxxxxx	A		
	B		
	C		
	D		

Prepared By: _____ Date: _____

DETAIL C

RL9025	25	25	82'(25000)	992225-RL9025	8716065224641
RL9020	20	20	65.6'(20000)	992220-RL9020	8716065224634
RL9015	15	15	49.2'(15000)	992215-RL9015	8716065224627
RL9010	10	10	32.8'(10000)	992210-RL9010	8716065224610
RL9005	05	5	16.4'(5000)	992205-RL9005	8716065171105
RL9003	03	3	9.84'(3000)	992203-RL9003	8716065171099
RL9002	02	2	6.56'(2000)	992202-RL9002	8716065171082
RL9051	51	1.5	4.92'(1500)	9922015-RL9051	8716065224603
RL9001	01	1	3.28'(1000)	992201-RL9001	8716065171075
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CULCOMER APPROVAL: DATE:

ITEM	Q'TY	PART NO.	DESCRIPTION
3	4PCS		LC DUST COVER, WHITE.
2	4SETS		CONNECTOR: LC/PC MM BEIGE HOUSING WITH WHITE BOOT.
1	1PC		CABLE: MULTIMODE, 62.5/125um, 2.0mm ZIPCORD, OFNR, ORANGE JACKET.

PART LILC

UNIT: Inches[mm]	TITLE: PATCHCORD LC-LC MULTIMODE DUPLEX 62.5/125, OM1, 2.0mm, ORANGE.	
DRAWN BY Catherine	DATE 2007/10/4	
CHECKED BY	DATE	CULCOMER / CULCOMER PART NO. RL90**
APPROVED BY	DATE	DRAWING NO. PK709023 / Ref. NO. / REV. A
SALE BY	DATE	TRENDEX PART NO.